


Installation Instruction

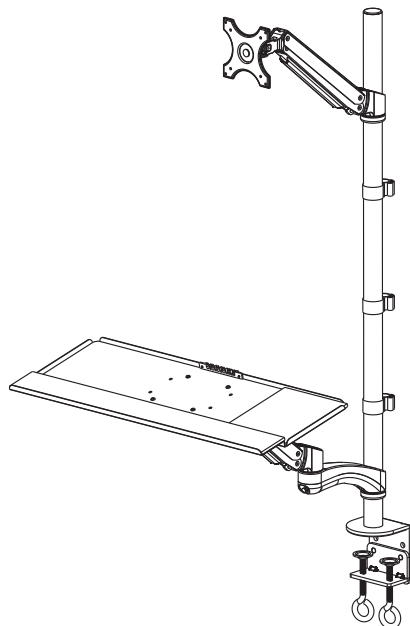

UNPACKING INSTRUCTIONS


- Carefully open the carton, remove contents and lay out on cardboard or other protective surface to avoid damage.
- Check package contents against the Supplied Parts List in the next page to assure that all components were received undamaged. Do not use damaged or defective parts.
- Carefully read all instructions before attempting installation.

IMPORTANT SAFETY INFORMATION


- Install and operate this device with care. Please read this instruction before installation, and carefully follow all instructions contained herein. Use proper safety equipment during installation.
- Please call a qualified installation contractor for help if you don't understand these directions or have any doubts about the safety of the installation.

Do not use this product for any purpose or in any configuration not explicitly specified in this instruction. We hereby disclaims any and all liability for injury or damage arising from incorrect assembly, incorrect mounting, or incorrect use of this product.


Supplied Parts List



(1) Pole-a



(1) "C" Clamp-b




(1) "C" Clamp Brace-c



(1) Grommet Base Plate-d



(1)M10 Bolt-e



(1)Support Plate-f




(1)M10 Washer-g




(1)Spring Washer-h




(3) M5x14 Bolt-i




(2)M10x15 Bolt-j



(2) VESA Plate with Gas Spring Arm-k



(1)Add-on Arm-l




(1)Wire Cover-m



(3)M4x6 Bolt-n




(1)Axis Cover-o




(1)M6x12 Bolt-p




(2)Stopper Ring-q




(1)Allen Key-r




(1)Wrench-s



(4)M4x12 Thumb Bolt-t




(4)M4x30 Bolt-u




(4)M4 Space-v



(3)Wire Clip-w



(1) Keyboard Tray-A



(1) Wrist Pad-B



(1) Mouse Pad-C



(4)M4x10 Bolt-D





(4)M4 Nut-E

Step 1 Install the Pole to the Desktop

Option A: Desk Clamp Install

1. Install the "C"-Clamp Brace(c) to the Pole (a) using 3pcs M5x14 Bolts(i), see Figure 1.

2. Install the "C"-Clamp(b) to the pole assembly according to the thickness of the desktop. The thickness can be changed to three positions. Connect it using 2pcs M10x15 Bolts(j), and tighten using the Allen Key(r). Tighten the "C"-Clamp to the desktop using the metal knob, see Figure 2.

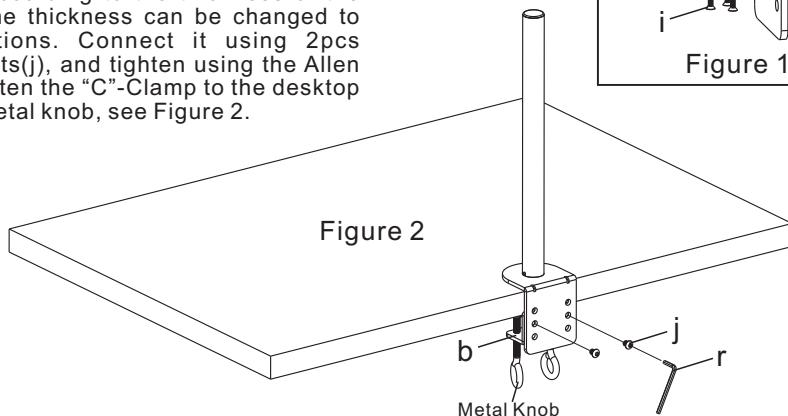



Option B: Grommet Base Install

Existing Grommet Hole Installation

If the existing grommet hole comes with a plastic protector, remove it to ensure a flat surface before installing the desk mount.

1. Install the Grommet Base Plate(d) to the Pole(a) using 3pcs M5x14 Bolts(i), see Figure 3.

2. Position the Pole(a) on the mounting surface and secure using the Support Plate(f), M10 Washer(g), Spring Washer(h) and M10 Bolt(e). Fasten the M10 Bolt using provided Wrench(s), see Figure 4.

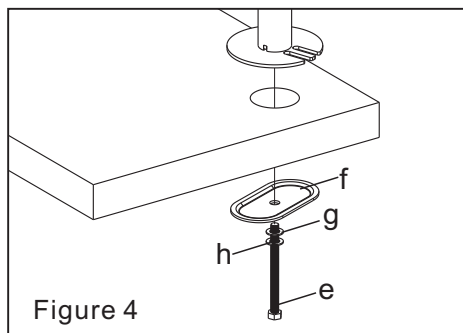

Step 1 Install the Pole to the Desktop



Option B: Grommet Base Install

Self Drilled Grommet Hole Installation



1. Position the Pole(a) on the mounting surface and mark the center hole. Drill a 3/8" (10mm) diameter hole at the marked position through the mounting surface.

2. Install the Grommet Base Plate(d) to the Pole(a) using 3pcs M5x14 Bolts(i), see Figure 5.

3. Position the Pole(a) on the mounting surface and secure using the Support Plate(f), M10 Washer(g), Spring Washer(h) and M10 Bolt(e). Fasten the M10 Bolt using provided Wrench(s), see Figure 6.

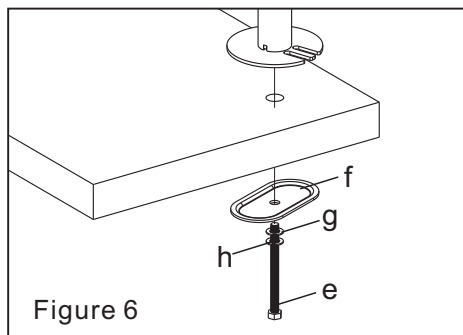



Step 2 Connect the Gas Spring Arm(k) and Add-on Arm(l)

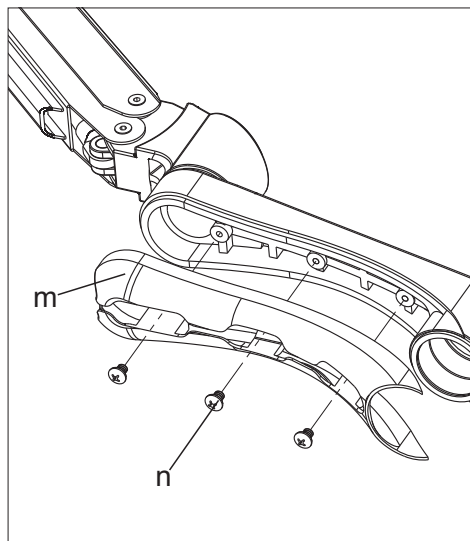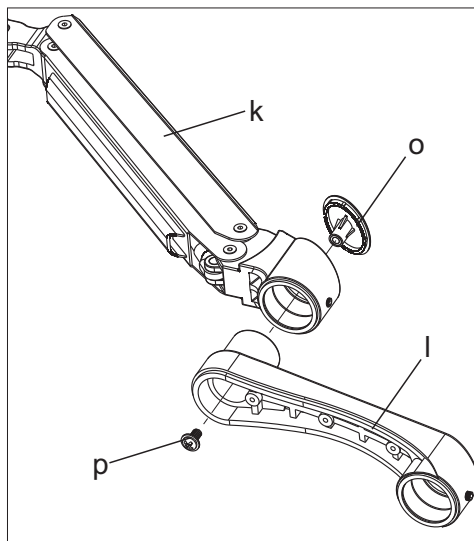



Step 3





Install Arms to the Pole

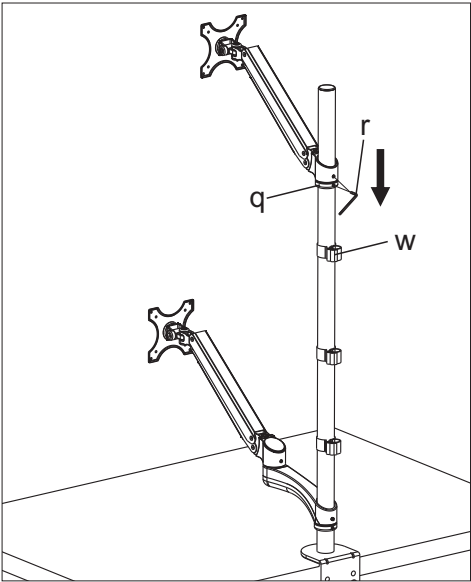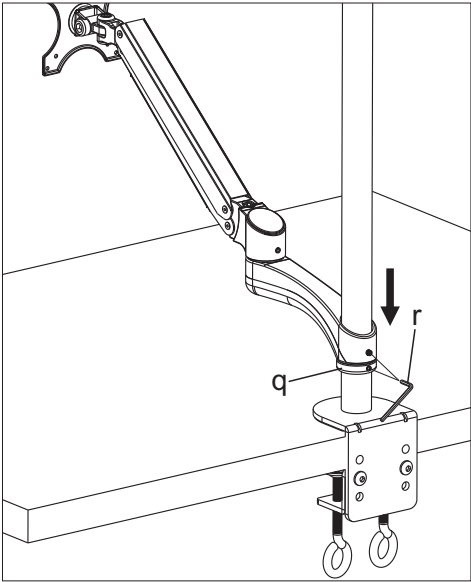


Step 4

Install the Keyboard/Mouse Tray to the Lower Arm

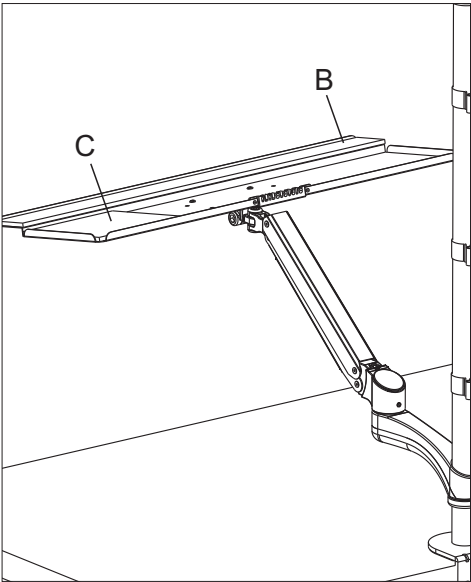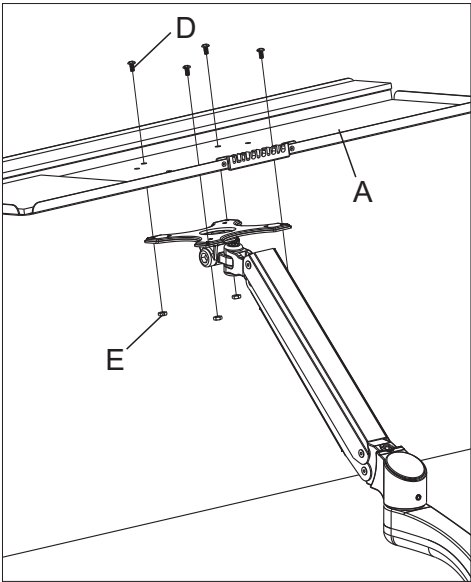

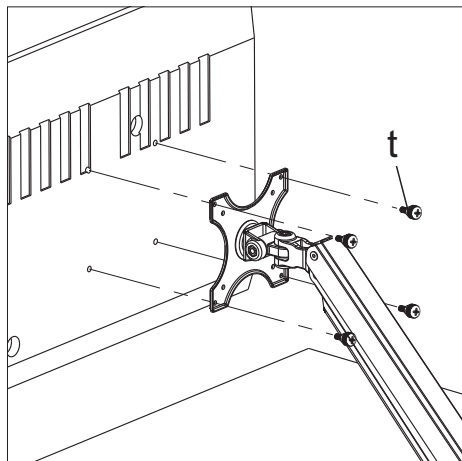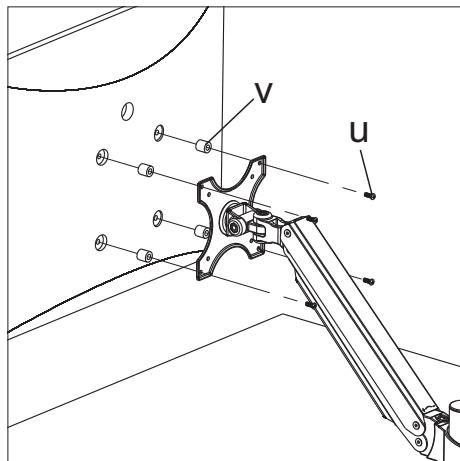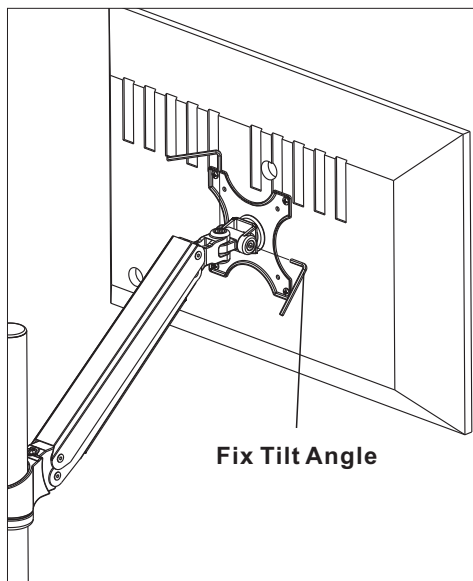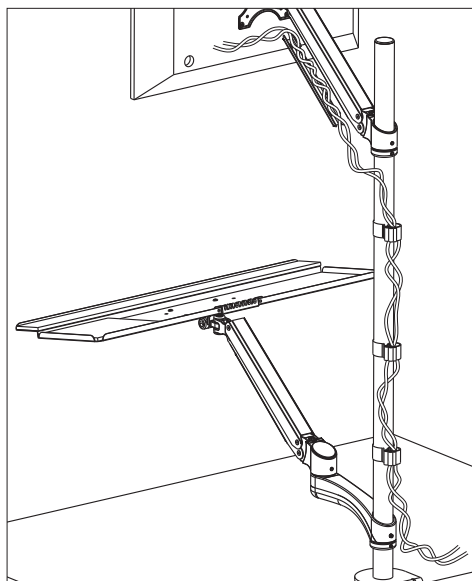Step 5**Mount the Monitor to VESA Plate****For Flat Back Monitor****For Curved Back Monitor****Step 6****Make Necessary Adjustments and Run Cables****Fix Tilt Angle**

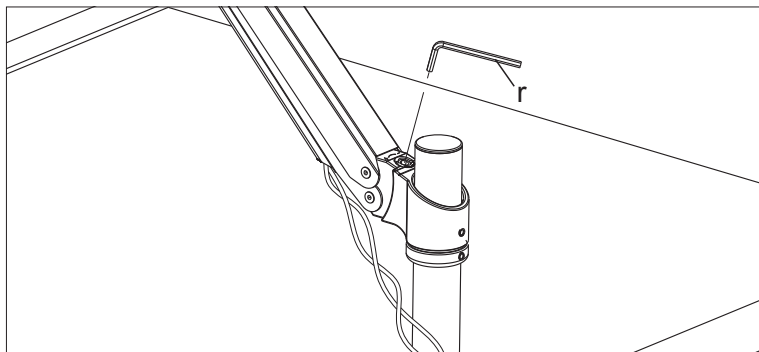Step 7**Adjust the Torque of Gas Spring**

Adjust the torque of gas spring according to the weight of your monitor. If your monitor can not stay in the lower position, turn the grub screw clockwise(-). If your monitor can not stay in the higher position, turn the grub screw counterclockwise(+). Keep turning until monitor position can be raised and lowered easily.

Thank you for choosing our products!